


Super Blue Ribbon® V-Belt

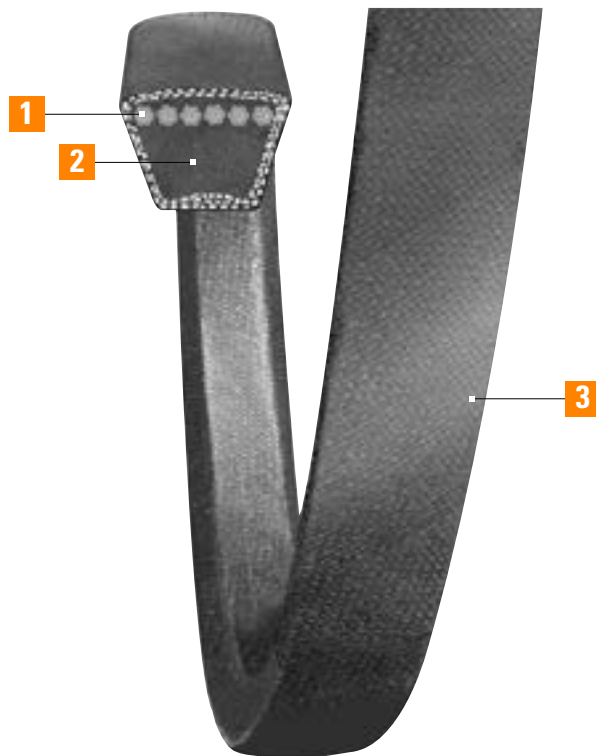

1 Oversized Polyester Cord
High-modulus cord carries the horsepower load with minimum stretch. Specially treated to produce a long-lasting bond with the surrounding rubber assuring longer belt life. Adds belt strength and stability during peak shock loads.

2 Compression Section
Synthetic rubber compound designed to support the cords evenly and compress while bending around the sheaves.

3 Heavy Duty Cover
Stress-relieved fabric impregnated with engineered rubber compounds protects the core and assures a smooth transfer of power. Resistant to oil, heat, and environmental conditions.

Recommended Sheaves:
Conventional – OD, Taper Bushed, or MST (A-B, C, D)

Dependable performance on classical v-belt drives

Long life

chekmate®

Heavy duty cover

Oil and heat resistant


Smooth running

Applications:

- Mixers
- Pumps
- Conveyors
- HVAC
- Anything and everything & More

Super Blue Ribbon®

V-Belt



Premium wrapped molded v-belt built to the highest standards in the industry. Ideal for classical drives with shock loads.

Super Blue Ribbon v-belts assure dependable length stability and require less re-tensioning and take-up. The cord is coated with a special compound that produces a secure, long-lasting bond with the surrounding rubber. The heavy-duty stress-relieved fabric cover protects the core and assures a smooth transfer of power. Its extra flexibility permits the belt to bend more easily around the smallest pulleys with less strain on the fabric. Long belt life results in less frequent replacement, less downtime and lower maintenance costs.

Super Blue Ribbon v-belts operate within a wide range of load capacities and speeds – with rated performance from 100 to 8,000 RPM and horsepower capability from 1 to 1,100 horsepower.

Super Blue Ribbon is the ideal choice for dependable performance on an extremely wide range of applications – A, B, C, D, and E cross sections – single or multiple belt drives.



Super Blue Ribbon® V-Belt Part Numbers

Part Number Example: **A50** = **A** **50**
↑ Cross Section ↑ Inside Circumference (inches)

Part Number	Legacy Part Number	Outside Circumference (inches)	Outside Circumference (mm)	Weight (lbs.)
A Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (A-B)				
A20	AP20	22.3	566	0.1
A21	AP21	23.6	599	0.1
A22	AP22	24.4	620	0.1
A23	AP23	25.5	648	0.2
A24	AP24	26.5	673	0.2
A25	AP25	27.5	699	0.2
A26	AP26	28.6	726	0.2
A27	AP27	29.7	754	0.2
A28	AP28	30.6	777	0.2
A29	AP29	31.5	800	0.2
A30	AP30	32.6	828	0.2
A31	AP31	33.6	853	0.2
A32	AP32	34.5	876	0.2
A33	AP33	35.6	904	0.2
A34	AP34	36.5	927	0.2
A35	AP35	37.6	955	0.2
A36	AP36	38.6	980	0.2
A37	AP37	39.5	1003	0.2
A38	AP38	40.4	1026	0.2
A39	AP39	41.6	1057	0.3
A40	AP40	42.6	1082	0.3
A41	AP41	43.5	1105	0.3
A42	AP42	44.5	1130	0.3
A43	AP43	45.5	1156	0.3
A44	AP44	46.6	1184	0.3
A45	AP45	47.4	1204	0.3
A46	AP46	48.5	1232	0.3
A47	AP47	49.5	1257	0.3
A48	AP48	50.5	1283	0.3
A49	AP49	51.5	1308	0.3
A50	AP50	52.3	1328	0.3
A51	AP51	53.6	1361	0.3
A52	AP52	54.6	1387	0.3

Part Number	Legacy Part Number	Outside Circumference (inches)	Outside Circumference (mm)	Weight (lbs.)
A Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (A-B)				
A53	AP53	55.6	1412	0.3
A54	AP54	56.6	1438	0.3
A55	AP55	57.6	1463	0.4
A56	AP56	58.6	1488	0.4
A57	AP57	59.5	1511	0.4
A58	AP58	60.3	1532	0.4
A59	AP59	61.5	1562	0.4
A60	AP60	62.5	1588	0.4
A61	AP61	63.6	1615	0.4
A62	AP62	64.6	1641	0.4
A63	AP63	65.6	1666	0.4
A64	AP64	66.6	1692	0.4
A65	AP65	67.6	1717	0.4
A66	AP66	68.5	1740	0.4
A67	AP67	69.6	1768	0.4
A68	AP68	70.5	1791	0.4
A69	AP69	71.4	1814	0.4
A70	AP70	72.6	1844	0.4
A71	AP71	73.6	1869	0.5
A72	AP72	74.5	1892	0.5
A73	AP73	75.5	1918	0.5
A74	AP74	76.6	1946	0.5
A75	AP75	77.7	1974	0.5
A76	AP76	78.4	1991	0.5
A77	AP77	79.5	2019	0.5
A78	AP78	80.5	2045	0.5
A79	AP79	81.7	2075	0.5
A80	AP80	82.5	2096	0.5
A81	AP81	83.7	2126	0.5
A82	AP82	84.6	2149	0.5
A83	AP83	85.4	2169	0.5
A84	AP84	86.5	2197	0.5
A84.5	AP84.5	87	2210	0.5

Super Blue Ribbon®

V-Belt

Super Blue Ribbon® V-Belt Part Numbers

Part Number	Legacy Part Number	Outside Circumference (inches)	Outside Circumference (mm)	Weight (lbs.)
A Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (A-B)				
A85	AP85	87.7	2228	0.5
A86	AP86	88.5	2248	0.5
A87	AP87	89.6	2276	0.5
A88	AP88	90.5	2299	0.6
A89	AP89	91.5	2324	0.6
A90	AP90	92.7	2355	0.6
A91	AP91	93.6	2377	0.6
A92	AP92	94.6	2403	0.6
A93	AP93	95.6	2428	0.6
A94	AP94	96.6	2454	0.6
A95	AP95	97.6	2479	0.6
A96	AP96	98.6	2504	0.6
A97	AP97	99.6	2530	0.6
A98	AP98	100.6	2555	0.6
A99	AP99	101.3	2573	0.6
A100	AP100	102.5	2604	0.6
A101	AP101	103.5	2629	0.6
A102	AP102	104.7	2659	0.6
A103	AP103	105.5	2680	0.6
A104	AP104	106.4	2703	0.7
A105	AP105	107.6	2733	0.7
A108	AP108	110.3	2802	0.7
A110	AP110	112.5	2858	0.7
A112	AP112	114.5	2908	0.7
A114	AP114	116.4	2957	0.7
A115	AP115	117.4	2982	0.7
A116	AP116	118.4	3007	0.7
A118	AP118	120.4	3058	0.7
A120	AP120	122.7	3117	0.8
A124	AP124	126.4	3211	0.8
A125	AP125	127.3	3233	0.8
A126	AP126	128.3	3259	0.8

Part Number	Legacy Part Number	Outside Circumference (inches)	Outside Circumference (mm)	Weight (lbs.)
A Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (A-B)				
A127	AP127	129.3	3284	0.8
A128	AP128	130.4	3312	0.8
A130	AP130	132.3	3360	0.8
A133	AP133	135.4	3439	0.8
A134	AP134	136.4	3465	0.8
A136	AP136	138.3	3513	0.9
A140	AP140	142.4	3617	0.9
A141	AP141	143.1	3635	0.9
A144	AP144	146.4	3719	0.9
A148	AP148	150.2	3815	0.9
A158	AP158	160.2	4069	1.0
A162	AP162	164.2	4171	1.0
A173	AP173	175.2	4450	1.1
A180	AP180	182.2	4628	1.1
A220	AP220	222.2	5644	1.4
A237	AP237	239.4	6081	1.5
B Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (A-B)				
B23	BP23	26.4	671	0.2
B24	BP24	27.4	696	0.2
B25	BP25	28.4	721	0.2
B26	BP26	29.5	749	0.2
B27	BP27	30.3	770	0.2
B28	BP28	31.3	795	0.3
B29	BP29	32.4	823	0.3
B30	BP30	33.4	848	0.3
B31	BP31	34.5	876	0.3
B32	BP32	35.4	899	0.3
B33	BP33	36.2	920	0.4
B34	BP34	37	940	0.3
B35	BP35	38.4	975	0.4
B36	BP36	39.3	998	0.4

Super Blue Ribbon®

V-Belt

Part Number Example: **B50** = **B** **50**
Cross Section Inside Circumference (inches)

Part Number	Legacy Part Number	Outside Circumference (inches)	Outside Circumference (mm)	Weight (lbs.)
B Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (A-B)				
B37	BP37	40.4	1026	0.4
B38	BP38	41.4	1052	0.4
B39	BP39	42.4	1077	0.4
B40	BP40	43.3	1100	0.4
B41	BP41	43.8	1113	0.4
B42	BP42	44.9	1141	0.4
B43	BP43	46.4	1179	0.5
B44	BP44	47.2	1199	0.5
B45	BP45	48.3	1227	0.5
B46	BP46	49.3	1252	0.5
B47	BP47	49.8	1265	0.5
B48	BP48	51.1	1298	0.5
B49	BP49	52.1	1323	0.5
B50	BP50	53	1346	0.5
B51	BP51	54.2	1377	0.5
B52	BP52	54.8	1392	0.5
B53	BP53	56	1422	0.6
B54	BP54	57.1	1450	0.5
B55	BP55	58	1473	0.6
B56	BP56	59.3	1506	0.6
B57	BP57	60.3	1532	0.6
B58	BP58	61.3	1557	0.6
B59	BP59	61.9	1572	0.6
B60	BP60	63.3	1608	0.6
B61	BP61	63.9	1623	0.6
B62	BP62	65	1651	0.7
B63	BP63	66	1676	0.6
B64	BP64	67.3	1709	0.7
B65	BP65	68.3	1735	0.7
B66	BP66	69.2	1758	0.7
B67	BP67	70.4	1788	0.7
B68	BP68	71.1	1806	0.7

Part Number	Legacy Part Number	Outside Circumference (inches)	Outside Circumference (mm)	Weight (lbs.)
B Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (A-B)				
B69	BP69	72.5	1842	0.7
B70	BP70	73.1	1857	0.7
B71	BP71	74.2	1885	0.7
B72	BP72	75.4	1915	0.8
B73	BP73	76.2	1936	0.8
B74	BP74	77.3	1963	0.8
B75	BP75	78.3	1989	0.8
B76	BP76	79.2	2012	0.8
B77	BP77	80.4	2042	0.8
B78	BP78	81.4	2068	0.8
B79	BP79	82.4	2093	0.8
B80	BP80	83.4	2118	0.8
B81	BP81	84.4	2144	0.8
B82	BP82	85.3	2167	0.9
B83	BP83	86.3	2192	0.9
B84	BP84	87.3	2217	0.9
B85	BP85	88.3	2243	0.9
B86	BP86	89.4	2271	0.9
B87	BP87	90.4	2296	0.9
B88	BP88	91.4	2322	0.9
B89	BP89	92.4	2347	0.9
B90	BP90	93.4	2372	0.9
B91	BP91	94	2388	0.9
B92	BP92	95.3	2421	1.0
B93	BP93	96.3	2446	1.0
B94	BP94	97.1	2466	1.0
B95	BP95	98.3	2497	1.0
B96	BP96	99.3	2522	1.0
B97	BP97	100.2	2545	1.0
B98	BP98	100.9	2563	1.0
B99	BP99	102	2591	1.0
B100	BP100	103.3	2624	1.0

Super Blue Ribbon®

V-Belt

Super Blue Ribbon® V-Belt Part Numbers

Part Number	Legacy Part Number	Outside Circumference (inches)	Outside Circumference (mm)	Weight (lbs.)
B Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (A-B)				
B101	BP101	104	2642	1.0
B102	BP102	105.2	2672	1.0
B103	BP103	106.2	2698	1.1
B104	BP104	107	2718	1.1
B105	BP105	108.1	2746	1.1
B106	BP106	109	2769	1.1
B107	BP107	110	2794	1.1
B108	BP108	111.5	2832	1.1
B109	BP109	112	2845	1.1
B110	BP110	112.8	2865	1.1
B111	BP111	114.2	2901	1.1
B112	BP112	115.2	2926	1.2
B113	BP113	116	2946	1.2
B114	BP114	117	2972	1.2
B115	BP115	118.1	3000	1.2
B116	BP116	119.1	3025	1.2
B117	BP117	120	3048	1.2
B118	BP118	121	3073	1.2
B119	BP119	122	3099	1.2
B120	BP120	123.1	3127	1.2
B122	BP122	125	3175	1.2
B123	BP123	126	3200	1.3
B124	BP124	126.9	3223	1.3
B125	BP125	128	3251	1.3
B126	BP126	129	3277	1.3
B128	BP128	130.9	3325	1.3
B130	BP130	133	3378	1.3
B131	BP131	134	3404	1.3
B132	BP132	135	3429	1.3
B133	BP133	136	3454	1.4
B134	BP134	137	3480	1.4
B135	BP135	138	3505	1.4

Part Number	Legacy Part Number	Outside Circumference (inches)	Outside Circumference (mm)	Weight (lbs.)
B Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (A-B)				
B136	BP136	139	3531	1.4
B138	BP138	141	3581	1.4
B140	BP140	143.2	3637	1.4
B141	BP141	143.6	3647	1.4
B142	BP142	145	3683	1.4
B144	BP144	147.1	3736	1.5
B146	BP146	149	3785	1.5
B148	BP148	151	3835	1.5
B150	BP150	153	3886	1.5
B151	BP151	154	3912	1.5
B152	BP152	155	3937	1.5
B154	BP154	157	3988	1.6
B156	BP156	159	4039	1.6
B157	BP157	160	4064	1.6
B158	BP158	161	4089	1.6
B160	BP160	163	4140	1.6
B161	BP161	164	4166	1.6
B162	BP162	165	4191	1.6
B164	BP164	167	4242	1.7
B165	BP165	168	4267	1.7
B168	BP168	171	4343	1.7
B170	BP170	173	4394	1.7
B172	BP172	175	4445	1.7
B173	BP173	176	4470	1.8
B175	BP175	178	4521	1.8
B176	BP176	179	4547	1.8
B177	BP177	180	4572	1.8
B180	BP180	183	4648	1.8
B182	BP182	185	4699	1.8
B184	BP184	187	4750	1.9
B190	BP190	193	4902	1.9
B191	BP191	194	4928	1.9

Super Blue Ribbon®

V-Belt

Part Number Example: **C50** = **C** **50**
Cross Section Inside Circumference (inches)

Part Number	Legacy Part Number	Outside Circumference (inches)	Outside Circumference (mm)	Weight (lbs.)
B Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (A-B)				
B195	BP195	198	5029	2.0
B197	BP197	200	5080	2.0
B198	BP198	201	5105	2.0
B202	BP202	205	5207	2.0
B203	BP203	206	5232	2.1
B205	BP205	208	5283	2.1
B210	BP210	213	5410	2.1
B214	BP214	217	5512	2.2
B215	BP215	218	5537	2.2
B217	BP217	220	5588	2.2
B220	BP220	223	5664	2.2
B221	BP221	224	5690	2.2
B223	BP223	224.5	5702	2.2
B224	BP224	225.5	5728	2.2
B225	BP225	226.5	5753	2.3
B228	BP228	231	5867	2.3
B240	BP240	241.5	6134	2.4
B244	BP244	245.5	6236	2.4
B250	BP250	253	6426	2.5
B253	BP253	256	6502	2.6
B255	BP255	256.5	6515	2.6
B265	BP265	268	6807	2.7
B270	BP270	271.5	6896	2.7
B275	BP275	276.5	7023	2.8
B280	BP280	281.5	7150	2.8
B285	BP285	286.5	7277	2.9
B300	BP300	301.5	7658	3.0
B315	BP315	316.5	8039	3.2
B330	BP330	331.5	8420	3.3
B360	BP360	361.5	9182	3.7
B433	BP433	436	11074	4.4
B443	BP443	446	11328	4.5

Part Number	Legacy Part Number	Outside Circumference (inches)	Outside Circumference (mm)	Weight (lbs.)
B Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (A-B)				
B512	BP512	513.5	13043	5.2
B543	BP543	544.5	13830	5.5
B553	BP553	554.5	14084	5.6
C Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (C)				
C46	CP46	50.3	1278	0.8
C50	CP50	54.5	1384	0.9
C51	CP51	55.6	1412	1.0
C53	CP53	57.4	1458	1.0
C54	CP54	58.8	1494	1.0
C55	CP55	59.7	1516	1.1
C56	CP56	59.9	1522	1.0
C57	CP57	61.1	1552	1.0
C58	CP58	63	1600	1.0
C60	CP60	64.6	1641	1.1
C61	CP61	65.3	1659	1.2
C62	CP62	66.8	1697	1.2
C63	CP63	67.6	1717	1.2
C64	CP64	68.6	1742	1.2
C65	CP65	69.6	1768	1.1
C66	CP66	70.1	1781	1.2
C67	CP67	71.8	1824	1.3
C68	CP68	72.7	1847	1.3
C69	CP69	73.3	1862	1.3
C70	CP70	74.8	1900	1.3
C71	CP71	75.6	1920	1.3
C72	CP72	76.6	1946	1.4
C73	CP73	77.7	1974	1.4
C74	CP74	78.2	1986	1.4
C75	CP75	79.6	2022	1.4
C76	CP76	80.6	2047	1.4
C77	CP77	81.6	2073	1.5

Super Blue Ribbon®

V-Belt

Super Blue Ribbon® V-Belt Part Numbers

Part Number	Legacy Part Number	Outside Circumference (inches)	Outside Circumference (mm)	Weight (lbs.)
C Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (C)				
C78	CP78	82.6	2098	1.5
C79	CP79	83.4	2118	1.5
C80	CP80	84.2	2139	1.5
C81	CP81	85.5	2172	1.5
C82	CP82	86.3	2192	1.5
C83	CP83	87.4	2220	1.6
C84	CP84	88.6	2250	1.6
C85	CP85	89.5	2273	1.6
C86	CP86	90.5	2299	1.6
C87	CP87	91.5	2324	1.6
C88	CP88	92.6	2352	1.7
C89	CP89	93.6	2377	1.7
C90	CP90	94.4	2398	1.7
C91	CP91	95.4	2423	1.7
C92	CP92	97	2464	1.7
C93	CP93	97.7	2482	1.7
C94	CP94	98.6	2504	1.8
C95	CP95	99.9	2538	1.8
C96	CP96	100.4	2550	1.8
C97	CP97	101.5	2578	1.8
C98	CP98	102.5	2604	1.8
C99	CP99	103.9	2639	1.9
C100	CP100	104.9	2665	1.9
C101	CP101	105.8	2687	1.9
C102	CP102	106.5	2705	1.9
C103	CP103	107.5	2731	1.9
C104	CP104	108.5	2756	1.9
C105	CP105	109.5	2781	2.0
C106	CP106	110.2	2799	2.0
C107	CP107	111.5	2832	2.0
C108	CP108	112.8	2865	2.0
C109	CP109	113.7	2888	2.0

Part Number	Legacy Part Number	Outside Circumference (inches)	Outside Circumference (mm)	Weight (lbs.)
C Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (C)				
C110	CP110	114.6	2911	2.0
C111	CP111	115.5	2934	2.1
C112	CP112	116.4	2957	2.1
C113	CP113	117.5	2985	2.1
C114	CP114	118.5	3010	2.1
C115	CP115	119.5	3035	2.1
C116	CP116	120.5	3061	2.2
C117	CP117	121.5	3086	2.2
C118	CP118	122.6	3114	2.2
C119	CP119	123.5	3137	2.2
C120	CP120	124.4	3160	2.2
C121	CP121	125.4	3185	2.3
C122	CP122	126.4	3211	2.3
C123	CP123	127.6	3241	2.3
C124	CP124	128.5	3264	2.3
C125	CP125	129.6	3292	2.3
C126	CP126	130.6	3317	2.3
C127	CP127	131.5	3340	2.4
C128	CP128	132.2	3358	2.4
C129	CP129	133.6	3393	2.4
C130	CP130	134.6	3419	2.4
C131	CP131	136	3454	2.4
C132	CP132	136.6	3470	2.4
C133	CP133	137.6	3495	2.5
C134	CP134	138.5	3518	2.5
C135	CP135	139.6	3546	2.5
C136	CP136	140.2	3561	2.5
C137	CP137	141.6	3597	2.5
C138	CP138	143.1	3635	2.6
C139	CP139	143.3	3640	2.6
C140	CP140	144.2	3663	2.6
C141	CP141	145.3	3691	2.6

Super Blue Ribbon®

V-Belt

Part Number Example: **C200** = **C** **200**
Cross Section Inside Circumference (inches)

Part Number	Legacy Part Number	Outside Circumference (inches)	Outside Circumference (mm)	Weight (lbs.)
C Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (C)				
C142	CP142	146.3	3716	2.6
C143	CP143	147.3	3741	2.6
C144	CP144	148.2	3764	2.7
C145	CP145	149.3	3792	2.7
C146	CP146	150.3	3818	2.7
C147	CP147	151.2	3841	2.7
C148	CP148	152.3	3868	2.7
C149	CP149	153.3	3894	2.8
C150	CP150	154.3	3919	2.8
C151	CP151	155.3	3945	2.8
C152	CP152	156.3	3970	2.8
C153	CP153	157.3	3995	2.8
C154	CP154	158.3	4021	2.8
C155	CP155	159.3	4046	2.9
C156	CP156	160.3	4072	2.9
C157	CP157	161.3	4097	2.9
C158	CP158	162.3	4122	2.9
C159	CP159	163.3	4148	2.9
C160	CP160	164.3	4173	3.0
C161	CP161	165.3	4199	3.0
C162	CP162	166.3	4224	3.0
C163	CP163	167.3	4249	3.0
C164	CP164	168.3	4275	3.0
C165	CP165	169.3	4300	3.0
C166	CP166	170.3	4326	3.1
C167	CP167	171.3	4351	3.1
C168	CP168	172.3	4376	3.1
C169	CP169	173.3	4402	3.1
C170	CP170	174.3	4427	3.1
C171	CP171	175.3	4453	3.2
C172	CP172	176.3	4478	3.2
C173	CP173	177.3	4503	3.2

Part Number	Legacy Part Number	Outside Circumference (inches)	Outside Circumference (mm)	Weight (lbs.)
C Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (C)				
C174	CP174	178.3	4529	3.2
C175	CP175	179.3	4554	3.2
C176	CP176	180.3	4580	3.2
C177	CP177	181.3	4605	3.3
C178	CP178	182.3	4630	3.3
C179	CP179	183.3	4656	3.3
C180	CP180	184.3	4681	3.3
C181	CP181	185.4	4709	3.3
C182	CP182	186.3	4732	3.4
C183	CP183	187.3	4757	3.4
C184	CP184	188.3	4783	3.4
C185	CP185	189.3	4808	3.4
C186	CP186	190.3	4834	3.4
C187	CP187	191.3	4859	3.4
C188	CP188	192.3	4884	3.5
C189	CP189	193.3	4910	3.5
C190	CP190	194.3	4935	3.5
C192	CP192	196.3	4986	3.5
C193	CP193	197.3	5011	3.6
C194	CP194	198.3	5037	3.6
C195	CP195	199.3	5062	3.6
C196	CP196	200.1	5083	3.6
C197	CP197	201.3	5113	3.6
C198	CP198	202.3	5138	3.7
C199	CP199	203.3	5164	3.6
C200	CP200	204.3	5189	3.7
C204	CP204	208.3	5291	3.8
C205	CP205	209.3	5316	3.8
C208	CP208	212.3	5392	3.8
C210	CP210	214.3	5443	3.9
C215	CP215	219.3	5570	4.0
C218	CP218	222.3	5646	4.0

Super Blue Ribbon®

V-Belt

Super Blue Ribbon® V-Belt Part Numbers

Part Number	Legacy Part Number	Outside Circumference (inches)	Outside Circumference (mm)	Weight (lbs.)
C Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (C)				
C220	CP220	224.3	5697	4.1
C225	CP225	227.3	5773	4.1
C228	CP228	230.3	5850	4.2
C230	CP230	232.3	5900	4.2
C235	CP235	237.3	6027	4.3
C236	CP236	238.3	6053	4.3
C240	CP240	242.3	6154	4.4
C245	CP245	247.3	6281	4.5
C248	CP248	250.3	6358	4.5
C250	CP250	252.3	6408	4.6
C255	CP255	257.3	6535	4.7
C260	CP260	262.3	6662	4.7
C264	CP264	266.5	6769	4.8
C265	CP265	267.6	6797	4.8
C269	CP269	271.5	6896	4.9
C270	CP270	272.5	6922	4.9
C275	CP275	277.6	7051	5.0
C276	CP276	278.5	7074	5.0
C280	CP280	282.5	7176	5.1
C285	CP285	287.5	7303	5.2
C290	CP290	292.6	7432	5.3
C297	CP297	299.5	7607	5.4
C300	CP300	302.5	7684	5.5
C314	CP314	316.5	8039	5.7
C315	CP315	317.5	8065	5.7
C330	CP330	332.5	8446	6.0
C340	CP340	342.5	8700	6.2
C345	CP345	347.5	8827	6.3
C360	CP360	362.5	9208	6.6
C390	CP390	392.5	9970	7.2
C420	CP420	422.5	10732	7.8

Part Number	Legacy Part Number	Outside Circumference (inches)	Outside Circumference (mm)	Weight (lbs.)
D Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (D)				
D88	DP88	93.5	2375	3.0
D90	DP90	95.5	2426	3.1
D96	DP96	101.5	2578	3.3
D98	DP98	103.5	2629	3.3
D100	DP100	105.5	2680	3.4
D101	DP101	106.5	2705	3.4
D104	DP104	109.5	2781	3.5
D105	DP105	110.5	2807	3.6
D108	DP108	113.5	2883	3.7
D112	DP112	117.5	2985	3.8
D115	DP115	120.5	3061	3.9
D120	DP120	125.5	3188	4.3
D124	DP124	129.5	3289	4.1
D128	DP128	133.4	3388	4.6
D132	DP132	137.5	3493	4.5
D134	DP134	139.5	3543	4.5
D135	DP135	140.5	3569	4.6
D136	DP136	141.5	3594	4.6
D140	DP140	145.5	3696	4.7
D144	DP144	149.2	3790	4.8
D152	DP152	157.2	3993	5.1
D154	DP154	159.2	4044	5.1
D157	DP157	162.2	4120	5.3
D158	DP158	163.2	4145	5.3
D160	DP160	165.5	4204	5.4
D162	DP162	167.2	4247	5.4
D164	DP164	169.5	4305	5.5
D165	DP165	170.5	4331	5.5
D166	DP166	171.2	4349	5.6
D168	DP168	173.2	4399	5.6
D170	DP170	175.2	4450	5.7

Super Blue Ribbon®

V-Belt

Part Number Example: **D300** = **D** **300**
Cross Section Inside Circumference (inches)

Part Number	Legacy Part Number	Outside Circumference (inches)	Outside Circumference (mm)	Weight (lbs.)
D Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (D)				
D171	DP171	176.2	4476	5.7
D173	DP173	178.2	4526	5.8
D177	DP177	182.2	4628	5.9
D178	DP178	183.2	4653	6.0
D180	DP180	185.2	4704	6.0
D189	DP189	194.2	4933	6.3
D195	DP195	200.2	5085	6.5
D210	DP210	215.2	5466	7.0
D225	DP225	227.7	5784	7.4
D230	DP230	232.7	5911	7.6
D240	DP240	242.7	6165	7.9
D248	DP248	250.7	6368	8.0
D255	DP255	257.7	6546	8.4
D260	DP260	262.7	6673	8.6
D270	DP270	272.7	6927	8.9
D280	DP280	282.7	7181	9.2
D285	DP285	287.7	7308	9.4
D300	DP300	302.7	7689	9.9
D315	DP315	317.7	8070	10.4
D330	DP330	332.7	8451	10.9
D345	DP345	347.7	8832	11.4
D360	DP360	362.7	9213	12.0
D390	DP390	392.7	9975	13.0
D420	DP420	422.7	10737	14.0
D450	DP450	453	11506	15.2
D480	DP480	483	12268	16.2
D540	DP540	543	13792	18.2
D660	DP660	663	16840	22.3

Part Number	Legacy Part Number	Outside Circumference (inches)	Outside Circumference (mm)	Weight (lbs.)
E Section – Recommended Sheaves: Conventional – QD, Taper Bushed, or MST (E*)				
E144	EP144	151.2	3841	7.9
E180	EP180	187.2	4755	9.8
E210	EP210	217.2	5517	11.4
E225	EP225	228.7	5809	12.0
E240	EP240	243.7	6190	12.8
E250	EP250	253.7	6444	13.0
E270	EP270	273.7	6952	14.4
E300	EP300	303.7	7714	16.0
E330	EP330	333.7	8476	17.6
E360	EP360	363.7	9238	19.3
E376	EP376	379.7	9644	20.2
E390	EP390	393.7	10000	20.9
E420	EP420	423.7	10762	22.5
E480	EP480	483.7	12286	25.7
E540	EP540	543.7	13810	29.0
E660	EP660	663.7	16858	35.4